



Specification sheet LX 1094
Roof drainage systems
Series 84 DRAINLET®




Horizontal manifold with gradient

Main drainage	
Gravity flow	
Silent Power	
Discharge rate:	3,2 l/sec
Water height:	35 mm
Roof penetration:	-
Diameter:	DN 70
LX-Number:	LX 1094
Weir height:	0 mm
Drain:	ventilated
Downpipe:	ventilated
Downpipe height:	-
Drainage:	in sewer

LX 1094 Piece list
 1 x Art.-No. choose drain on page two!

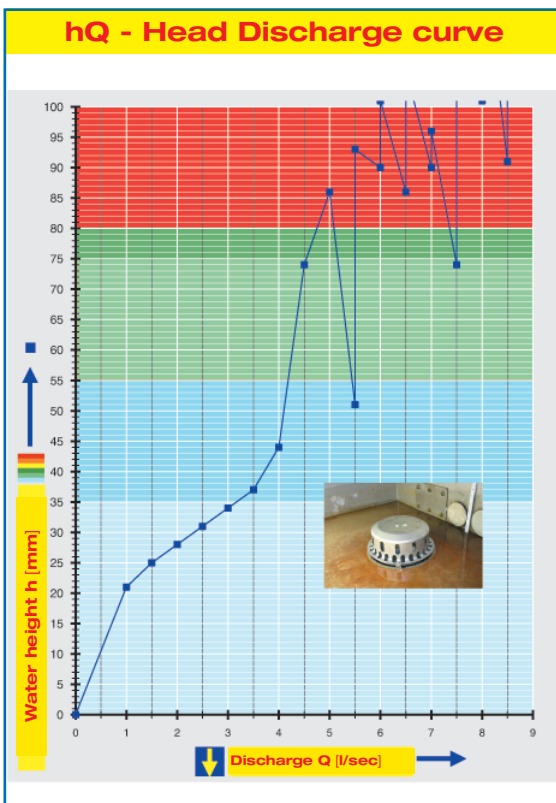

Systempower

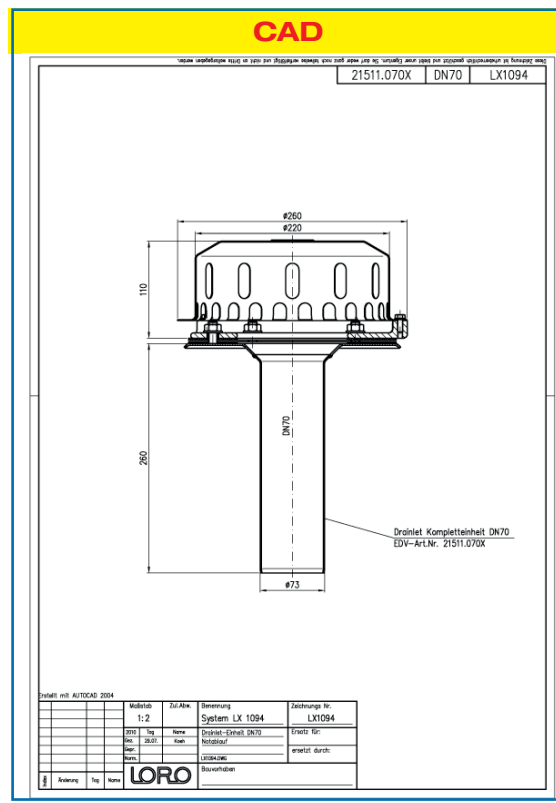

Systemshape

Water height	mm	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95
Discharge	l/sec	0,5	0,7	0,9	1,5	2,3	3,2	3,7	4,0	4,1	4,2	4,3	4,4	4,5					
							Silent Power												

Choose drain for piece list on page one!

DN 70

without thermal insulation

LX1094-5X

one-piece clamping flange
for bituminous and plastic roofing sheets



Drain
Art.-No. 21511.070X



Fire protection drain
Art.-No. 22501.070X

LX1094-6X

two-piece clamping flange
for bituminous and plastic roofing sheets



Drain
Art.-No. 21521.070X



Fire protection drain
Art.-Nr. 22521.070X

with thermal insulation

LX1094-7X

one-piece clamping flange
for bituminous and plastic roofing sheets



Drain
Art.-No. 21512.070X



Fire protection drain
Art.-No. 22502.070X

LX1094-8X

two-piece clamping flange
for bituminous and plastic roofing sheets



Drain
Art.-No. 21522.070X



Fire protection drain
Art.-No. 22522.070X

with thermal insulation and heating

LX1094-9X

one-piece clamping flange
for bituminous and plastic roofing sheets



Drain
Art.-No. 21513.070X

LX1094-10X

two-piece clamping flange
for bituminous and plastic roofing sheets



Drain
Art.-No. 21523.070X

Fire protection drains: The discharge capacity of the DRAINLET fire protection drains is identical to the one of the standard DRAINLET drains.

Heat tracing: Lorowerk recommends to check all drains and pipes with regard to their frost-sensibility. Where necessary, these parts should be upgraded with heat tracing.