


Specification sheet LX 1095 Roof drainage systems Series 84 DRAINLET®

Emergency drainage

Gravity flow

Silent Power





Horizontale Sammelleitung mit Gefälle

Discharge rate:	5,5 l/sec
Water height:	75 mm
Roof penetration:	-
Diameter:	DN 70
LX-Number:	LX 1095
Weir height:	35 mm
Drain:	ventilated
Downpipe:	ventilated
Downpipe height:	-
Drainage:	in sewer

LX 1095 Piece list

1 x Art.-No. choose drain on page two!

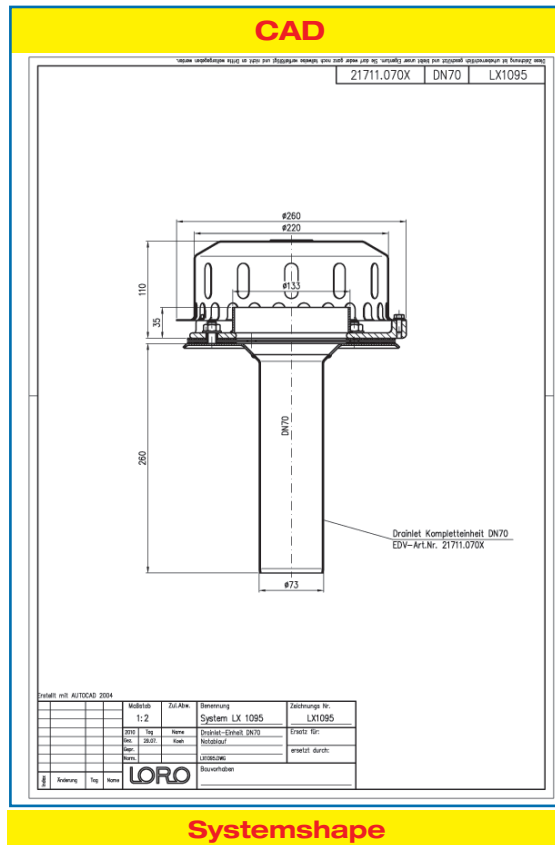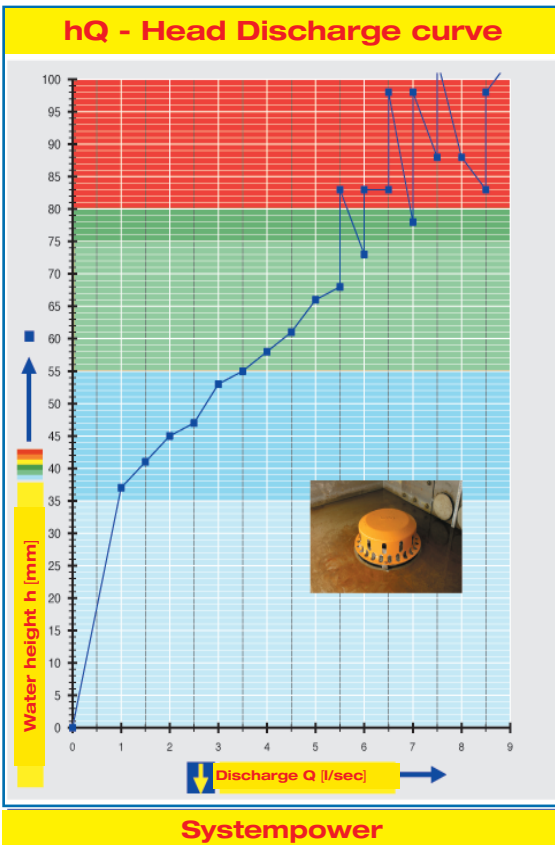

Water height	mm	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95
Discharge	l/sec							1,4	2,0	2,7	3,5	4,4	4,9	5,5	5,5	5,5	6,5	6,5	6,5
Silent Power																			

Choose drain for piece list on page one!

DN 70

without thermal insulation

LX1095-5X

**with clamping flange
one-piece**
for bituminous and plastic
roofing sheets



Drain
Art.-No. 21711.070X



Fire protection drain
Art.-No. 22701.070X

LX1095-6X

**with clamping flange
two-piece**
for bituminous and plastic
roofing sheets



Drain
Art.-No. 21721.070X



Fire protection drain
Art.-No. 22721.070X

with thermal insulation

LX1095-7X

**with clamping flange
one-piece**
for bituminous and plastic
roofing sheets



Drain
Art.-No. 21712.070X



Fire protection drain
Art.-No. 22702.070X

LX1095-8X

**with clamping flange
two-piece**
for bituminous and plastic
roofing sheets



Drain
Art.-No. 21722.070X



Fire protection drain
Art.-No. 22722.070X

with insulation and heating

LX1095-9X

**with clamping flange
one-piece**
for bituminous and plastic
roofing sheets



Drain
Art.-No. 21713.070X

LX1095-10X

**with clamping flange
two-piece**
for bituminous and plastic
roofing sheets



Drain
Art.-No. 21723.070X

Fire protection drains: The discharge capacity of the DRAINLET fire protection drains is identical to the one of the standard DRAINLET drains.

Heat tracing: Lorowerk recommends to check all drains and pipes with regard to their frost-sensibility. Where necessary, these parts should be upgraded with heat tracing.