

Specification sheet LX 1827

Retention roof drainage Series 84 DRAINLET® with variable retention

Main drainage

Gravity flow


Silent

Discharge rate:	1,6 l/sec
Water height:	35 mm
Roof penetration:	-
Diameter:	DN 100
LX-Number:	LX1827
Weir height:	0 mm
Drain:	ventilated
Downpipe:	not ventilated
Downpipe height:	4,2 m
Drainage:	in sewer
Flange:	Clamping flange

3 Retentionsöffnungen
51 mm x 20 mm auf
Umfang verteilt

Attention:


with object-related retention openings and retention pipe cut to size.
Please contact the LORO Service Team before ordering!

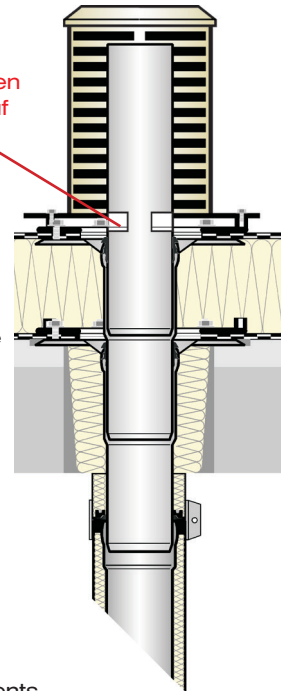

LX 1827 Piece list


- | | |
|--|--|
| 1 x Art.-No. 41511.100X, Retention roof drainage | 6 x Art.-No. 09911.100X, LORO X Sealing elements |
| 1 x Art.-No. 01401.100X, LORO-X Pipe with one socket | 3 x Art.-No. 00975.100X, LORO-X Pipe clips |
| 2 x Art.-No. 00300.100X, LORO-X Bend | 3 x Art.-No. 09604.100X, LORO-X Threaded rods |
| 1 x Art.-No. 01004.100X, LORO-X Pipe with one socket | 1 x Art.-No. 00986.000X, LORO-X Lubricant |
| 1 x Art.-No. 05510.100X, LORO-X Stand pipe | |

hQ - Head Discharge curve

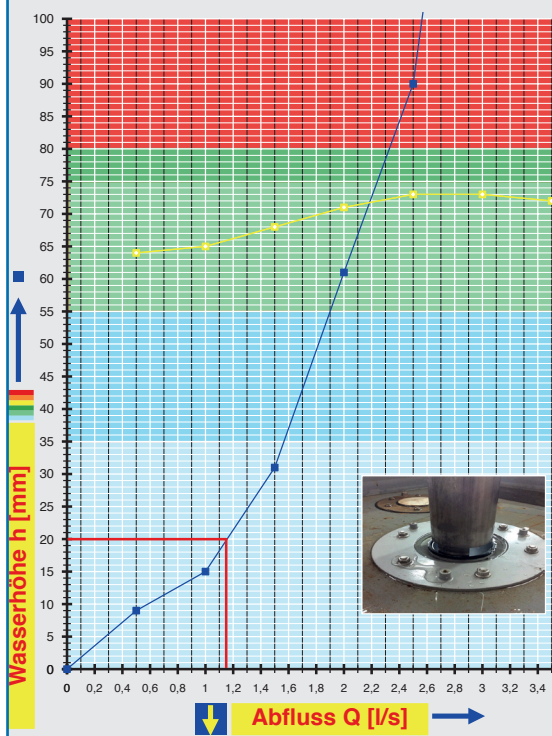

Systempower

CAD

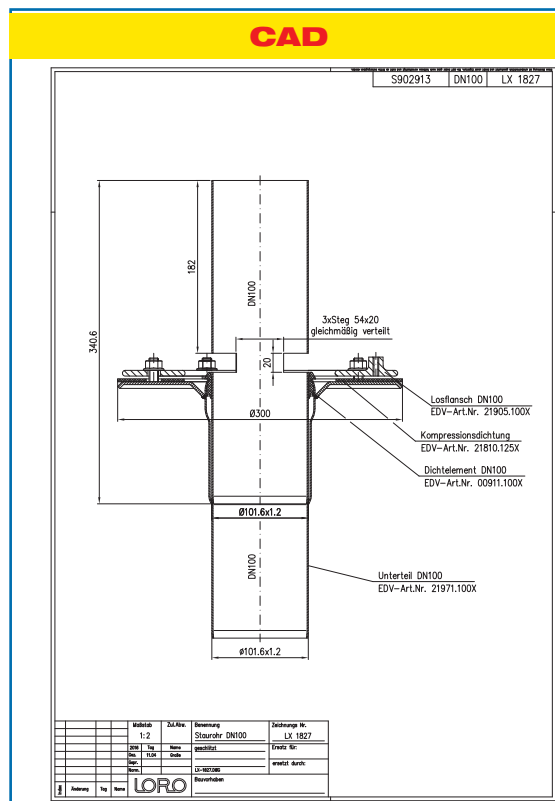

Systemshape

Water height	mm	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
Discharge	l/sec	0,6	1,0	1,1	1,3	1,5	1,6	1,6	1,7	1,8	1,9	2,0	2,1	2,2	2,2	2,3	2,4	2,5
Silent																		

LORO-X Retention roof drainage

LX1827-X

Retention roof drain
 Art.-No. 41511.100X
 Weight: 5,6 kg

with clamping flange
 for bituminous and plastic roofing sheets

