

Specification sheet LX 465

Parapet roof drainage systems


Series 79/88 RAINSTAR[®]

Emergency drainage

Gravity flow

Silent Power

Discharge rate:	10,0 l/sec
Water height:	75 mm
Roof penetration:	92 mm
Diameter:	DN 70
LX-Number:	LX 465
Weir height:	35 mm
Drain:	ventilated
Downpipe:	not ventilated
Downpipe height:	4,2 m
Drainage:	on floor
Flange form:	Clamping flange

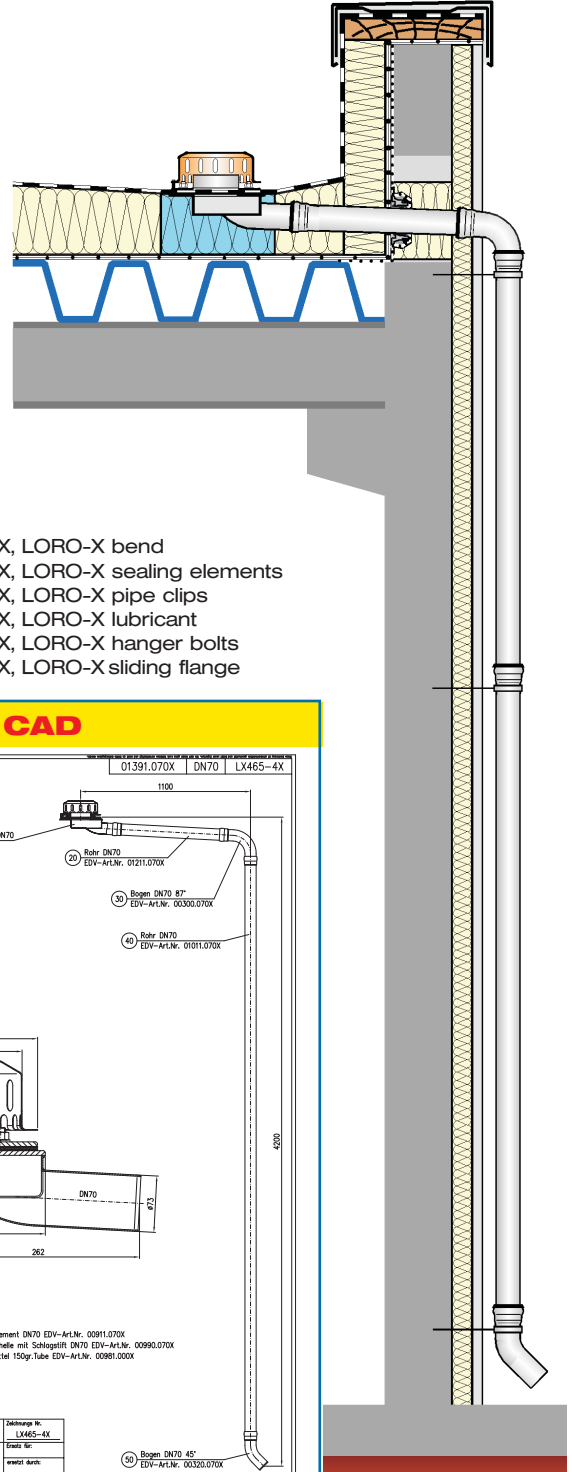


LX 465 Piece list

- 1 x Art.-No. choose drain on page two!
- 1 x Art.-No. 01384.000X, LORO-Thermal insulation box
- 1 x Art.-No. 01301.070X, LORO-X pipe with one socket
- 1 x Art.-No. 00350.070X, LORO-X bend
- 1 x Art.-No. 01101.070X, LORO-X pipe with one socket
- 2 x Art.-No. 01201.070X, LORO-X pipe with one socket


- 1 x Art.-No. 00320.070X, LORO-X bend
- 6 x Art.-No. 00911.070X, LORO-X sealing elements
- 3 x Art.-No. 00972.070X, LORO-X pipe clips
- 1 x Art.-No. 00986.000X, LORO-X lubricant
- 3 x Art.-No. 09603.120X, LORO-X hanger bolts
- 1 x Art.-No. 13235.070X, LORO-X sliding flange

hQ - Head-Discharge curve

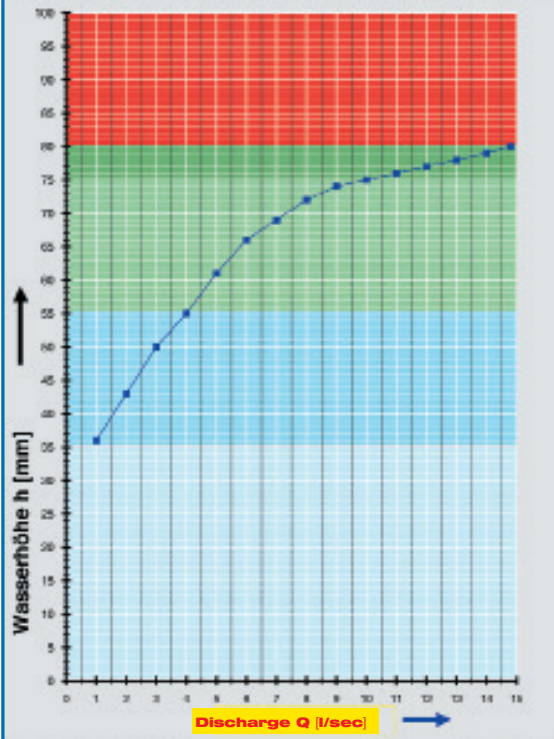

Systempower

CAD

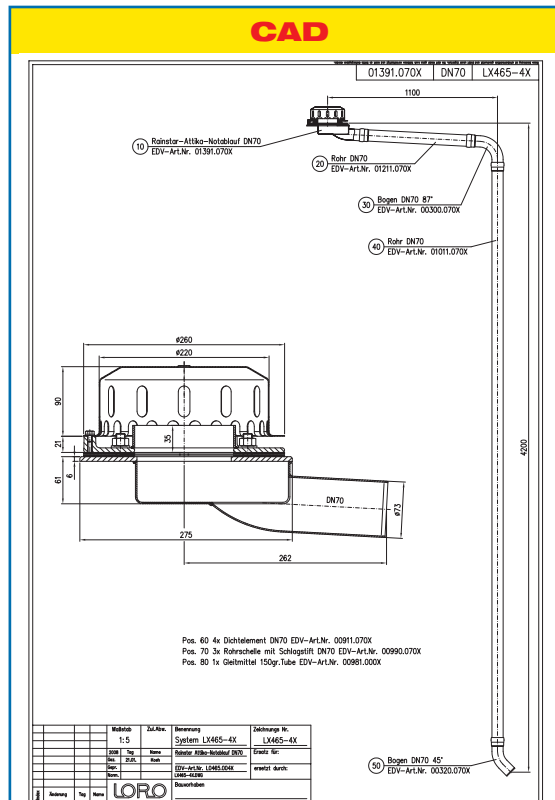

Systemshape

Water height	mm	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75
Discharge	l/sec							1,0	1,6	2,3	3,0	4,0	4,8	5,8	7,2	10,0
								Silent				Silent Power				




Choose drain for piece list on page one!

DN 70

LX465-1X

Drain Art.-No. 01373.070X
Weight: 6,4 kg




Series 79 (RB)
clamping flange 90°
for plastic roofing sheets

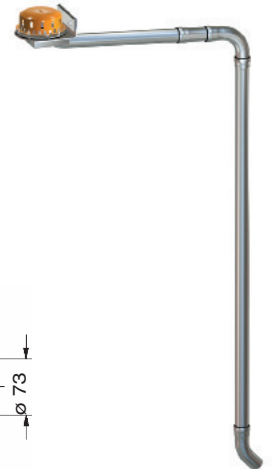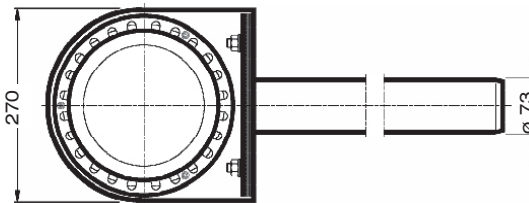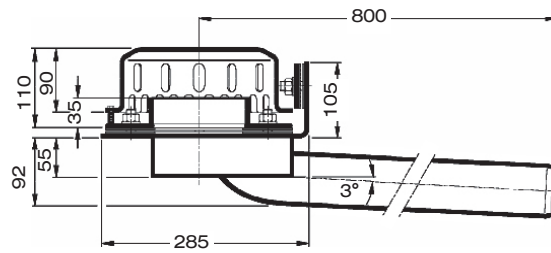

LX465-2X

Drain Art.-No. 01371.070X
Weight: 6,3 kg





Series 79 (RB)
clamping flange 45°
for bituminous roofing sheets

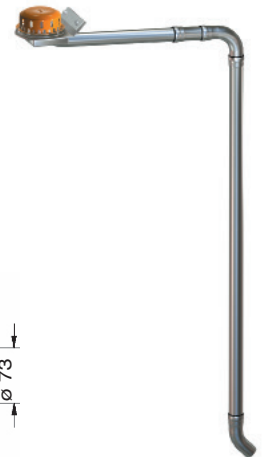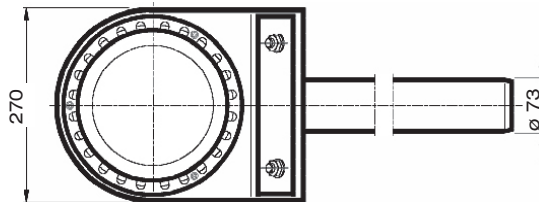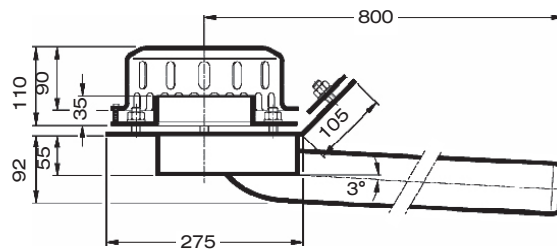

LX465-4X

Drain Art.-No. 01391.070X
Weight: 4,2 kg

Series 88
clamping flange
without raised edge
for bituminous and plastic
roofing sheets

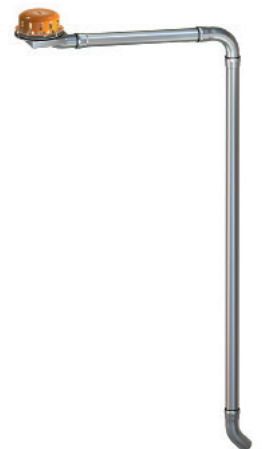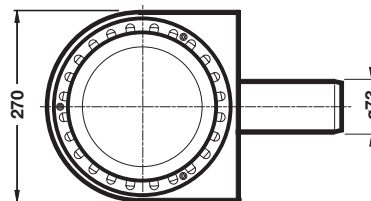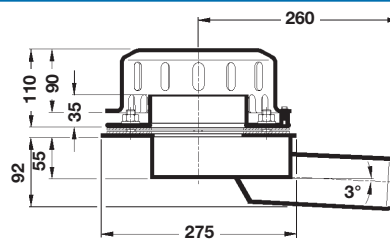

Heat tracing: Lorowerk recommends to check all drains and pipes with regard to their frost-sensibility. Where necessary, these parts should be upgraded with heat tracing.