

Specification sheet LX 471


**Parapet roof drainage systems
Series 89 RAINSTAR®
with roof penetration of 55 mm**

Main Drainage

Gravity flow

Silent

Discharge rate:	5,0 l/sec
Water height:	35 mm
Roof penetration:	55 mm
Diameter:	DN 70
LX-Number:	LX 471
Weir height:	0 mm
Drain:	ventilated
Downpipe:	not ventilated
Downpipes height:	4,2 m
Entwässerung:	in sewer
Flange form:	Clamping flange


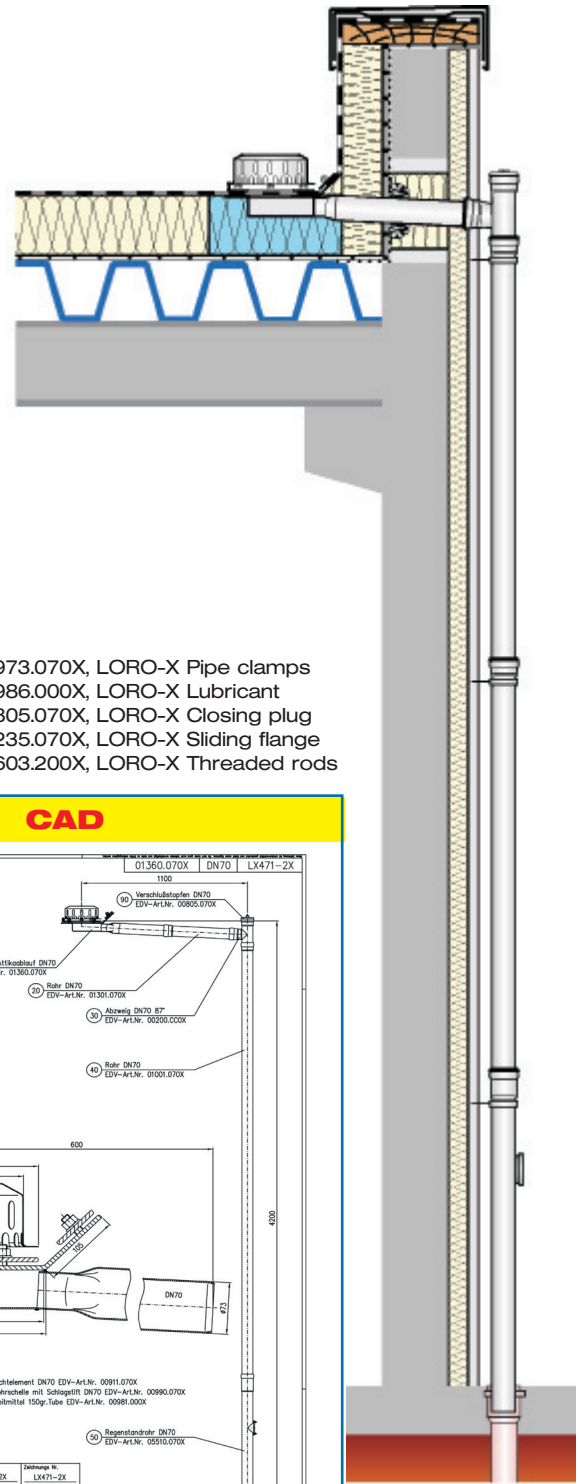


LX 471 Piece list

1 x Art.-No. choose drain on page two!

- 1 x Art.-No. 01301.070X, LORO-X Pipe with one socket
- 1 x Art.-No. 00200.CC0X, LORO-X Branch
- 1 x Art.-No. 01001.070X, LORO-X Pipe with one socket
- 1 x Art.-No. 05510.070X, LORO-X Stand pipe
- 4 x Art.-No. 00911.070X, LORO-X Sealing elements

- 3 x Art.-No. 00973.070X, LORO-X Pipe clamps
- 1 x Art.-No. 00986.000X, LORO-X Lubricant
- 1 x Art.-No. 00805.070X, LORO-X Closing plug
- 1 x Art.-No. 13235.070X, LORO-X Sliding flange
- 3 x Art.-No. 09603.200X, LORO-X Threaded rods

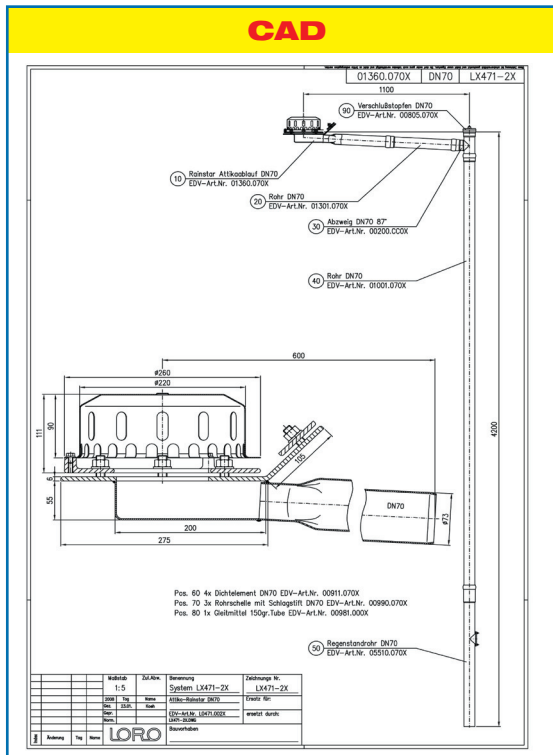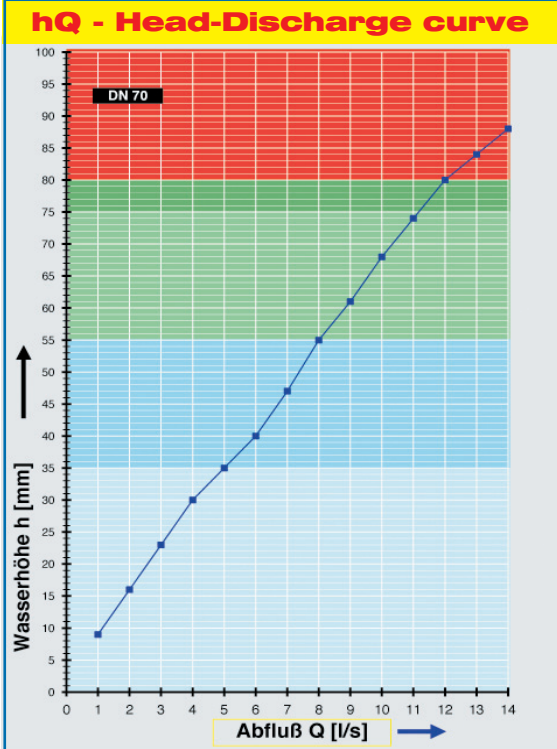

Systempower

Systemshape

Water height	mm	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75
Discharge	l/sec		1,1	1,8	2,5	3,2	4,0	5,0	6,0	6,7	7,3	8,0	8,9	9,5	10,1	11,0
			Silent			Silent Power			Power							



Choose drain for piece list on page one!

DN 70

LX471-1X

Drain Art.-No. 01362.070X
Weight: 8,2 kg



Series 89
with roof penetration of 55 mm
clamping flange 90°
for plastic roofing sheets

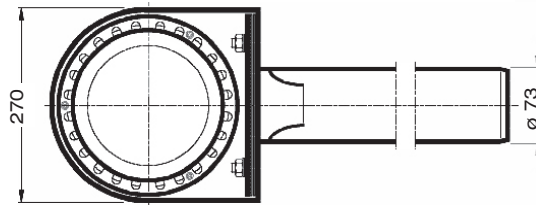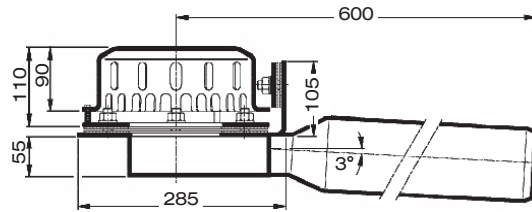

LX471-2X

Drain Art.-No. 01360.070X
Weight: 8,0 kg

Series 89
with roof penetration of 55 mm
clamping flange 45°
for bituminous roofing sheets

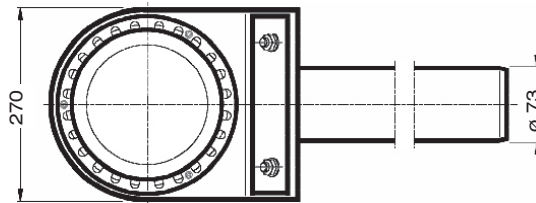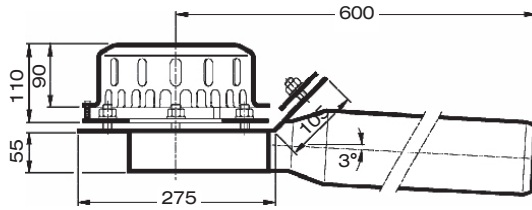

Heat tracing: Lorowerk recommends to check all drains and pipes with regard to their frost-sensibility. Where necessary, these parts should be upgraded with heat tracing.