


Specification sheet LX 636
Siphonic Parapet drains
Series 62 DRAINJET®
without roof penetration

Main Drainage

Siphonic flow

Silent Power



Discharge rate:	16,0 l/sec
Water height:	55 mm
Roof penetration:	0 mm
Diameter:	DN 70
LX-Number:	LX 636
Weir height:	0 mm
Drain:	not ventilated
Downpipe:	not ventilated
Downpipe height:	min 4,2 m
Drainage:	in sewer

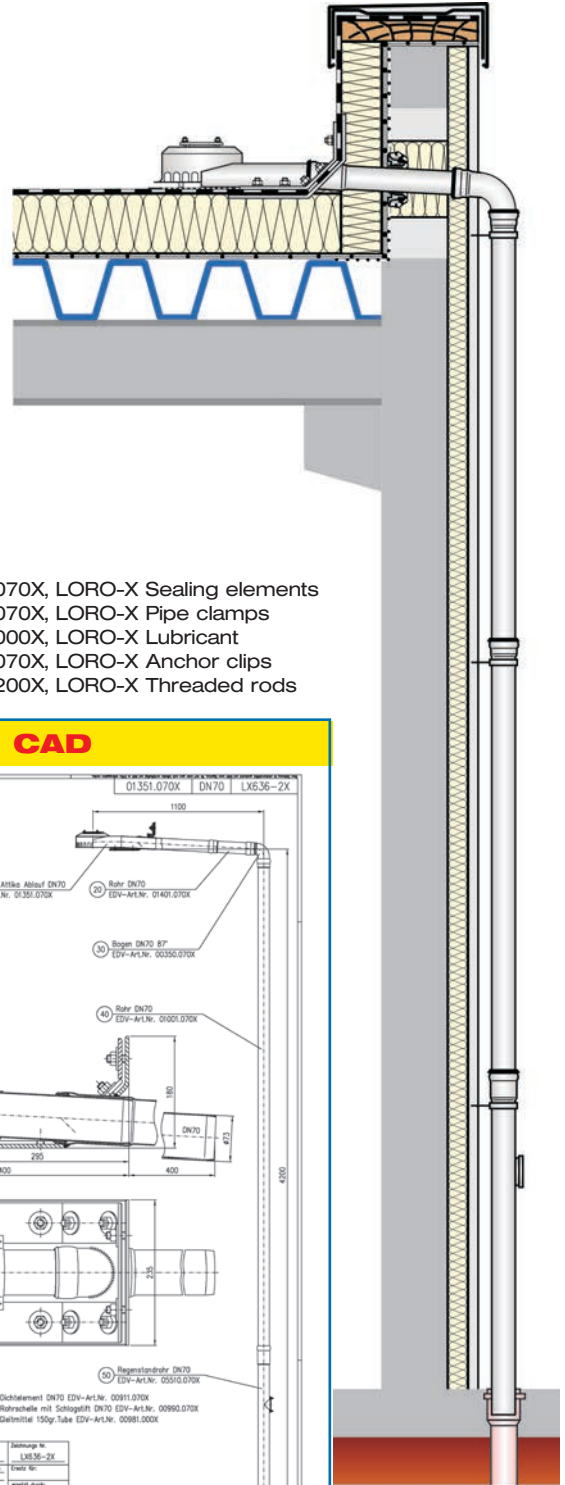

LX 636 Piece list

- 1 x Art.-No. **choose drain on page two!**
- 1 x Art.-No. 01401.070X, LORO-X Pipe with one socket
- 1 x Art.-No. 13235.070X, LORO-Sliding flange
- 1 x Art.-No. 00350.070X, LORO-X Bend
- 1 x Art.-No. 01001.070X, LORO-X Pipe with one socket
- 1 x Art.-No. 05510.070X, LORO-X Stand pipe

- 4 x Art.-No. 00911.070X, LORO-X Sealing elements
- 3 x Art.-No. 00973.070X, LORO-X Pipe clamps
- 1 x Art.-No. 00986.000X, LORO-X Lubricant
- 2 x Art.-No. 00806.070X, LORO-X Anchor clips
- 3 x Art.-No. 09603.200X, LORO-X Threaded rods

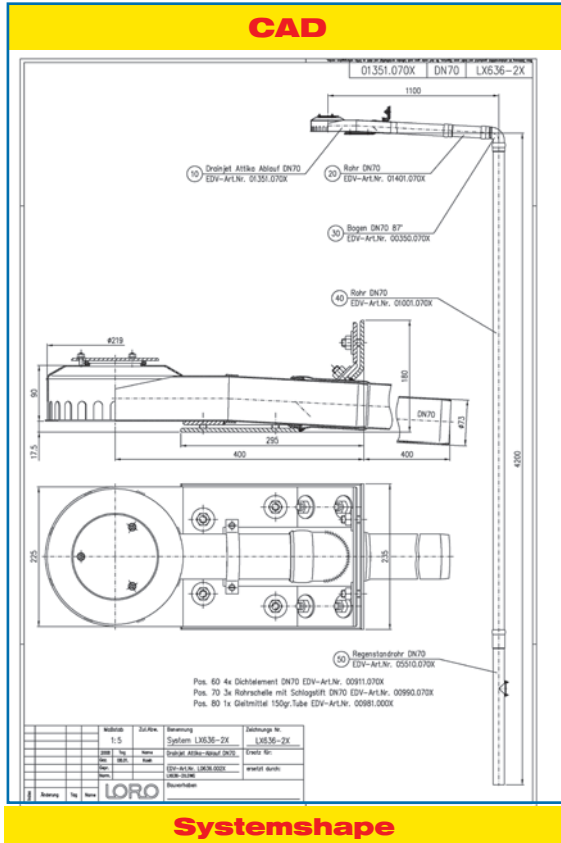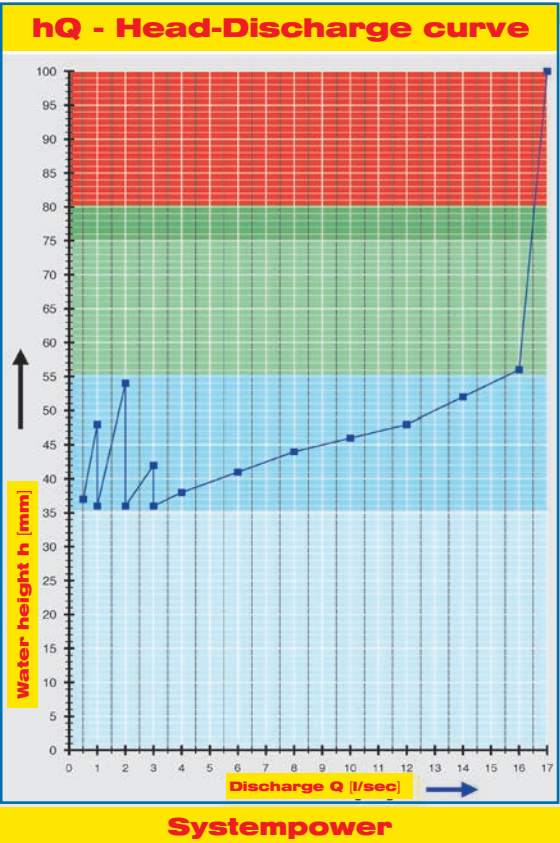


Water height	mm	10	15	20	25	30	35	40	45	50	55	60	65	70	75
Discharge	l/sec						3,0	5,4	9	13	16				
		Silent					Silent Power								

Choose drain for piece list on page one!

LX636-1X

Drain Art.-No. 01358.070X


clamping flange 90°
for plastic roofing sheets

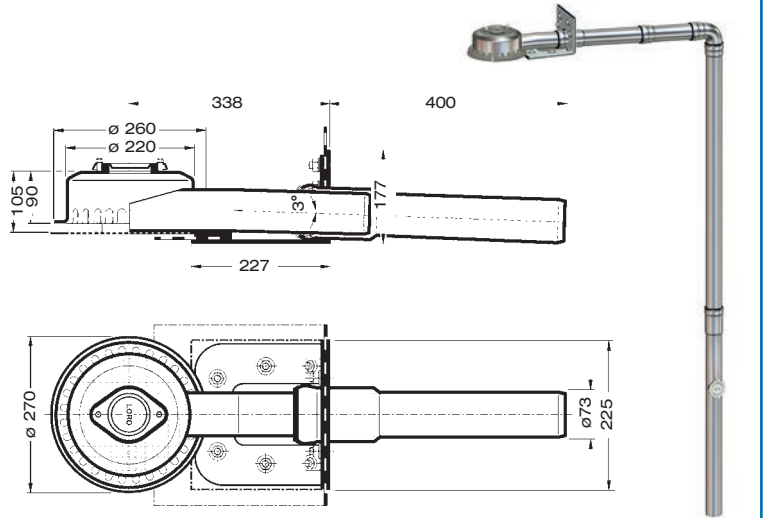

LX636-2X

Drain Art.-No. 01351.070X


clamping flange 45°
for bituminous roofing sheets

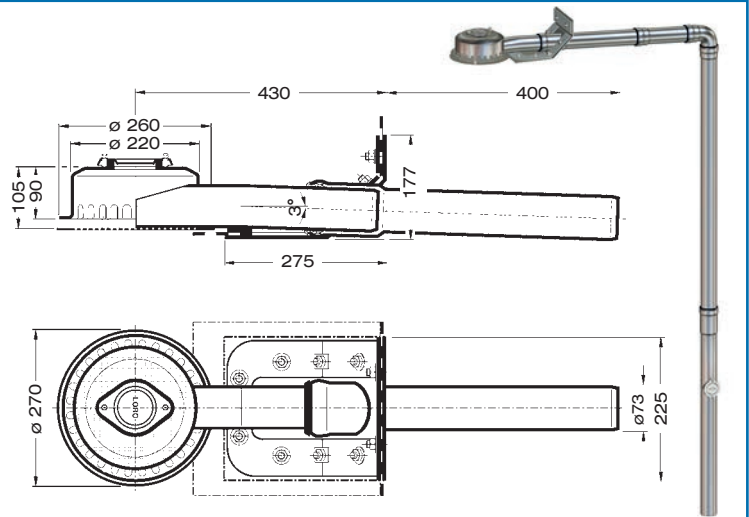

LX636-3X

Drain Art.-No. 01347.070X

bonding flange 45°
for bituminous roofing sheets

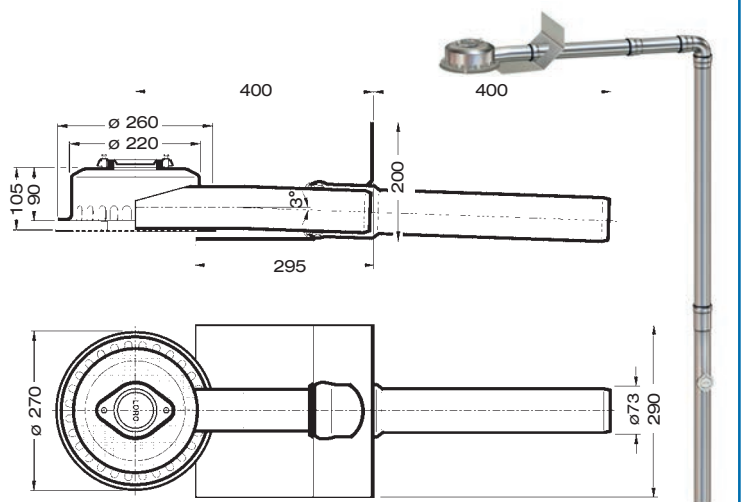

Please note:

For drainage systems with siphonic flow it is vital that only LORO-X pipes and fittings in the combination as indicated are used. Mixture or exchange of system parts may result in lower discharge capacities! The height of the downpipe must be a min. 4.2m for the indicated capacity to be obtained. If roof drain and downpipe are fitted by different crews, then do follow the system setup acc. to the LX-data sheet at www.loro-x.com

Heat tracing: Lorowerk recommends to check all drains and pipes with regard to their frost-sensibility. Where necessary, these parts should be upgraded with heat tracing.