

## Specification sheet LX 859

### Serie 93 ATTIKASTAR® as spout

**Emergency drainage**

**Gravity flow**

**Silent**

**Discharge rate: 9,1 l/sec**

**Water height: 75 mm**

**Roof penetration: 106 mm**

**Diameter: DN 100**

**LX-Number: LX 859**


**Weir height: 40 mm**

**Drain: ventilated**

**Downpipe: -**

**Downpipe height: 0 m**


**Drainage: on floor**

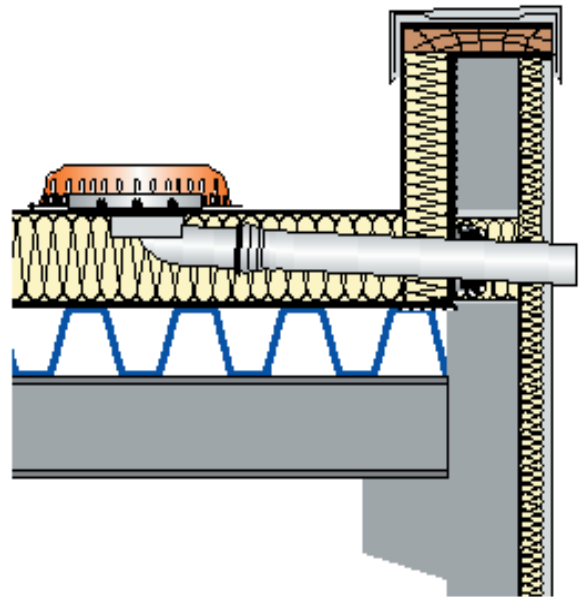

#### LX 859 Piece list


- 1 x Art.-No. 01394.100X, ATTIKASTAR® Emergency drain
- 1 x Art.-No. 01201.100X, LORO-X pipe with one socket
- 1 x Art.-Nr. 13235.100X, LORO-sliding flange
- 1 x Art.-Nr. 00911.100X, LORO-X sealing element
- 1 x Art.-Nr. 00986.000X, LORO-X lubricant

#### hQ - Head-Discharge curve

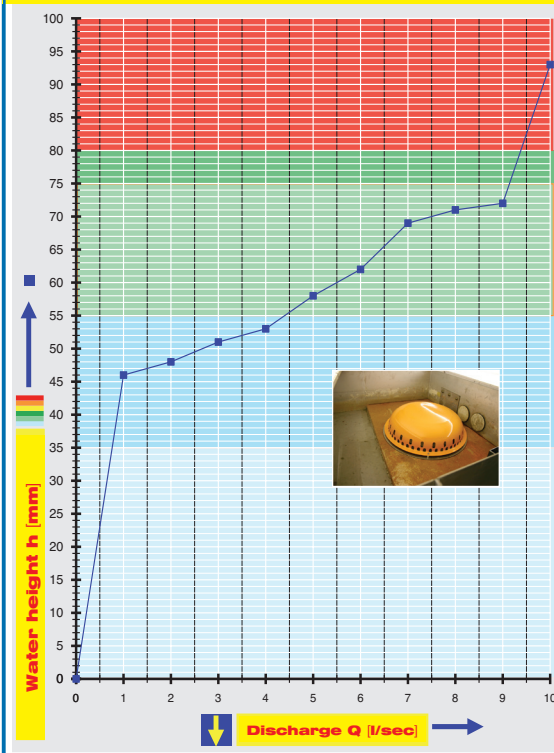


**Systempower**

#### CAD

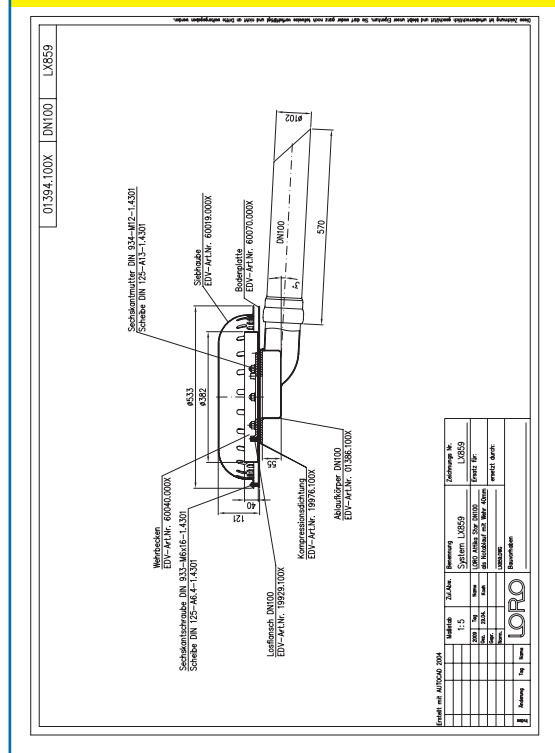

**Systemshape**

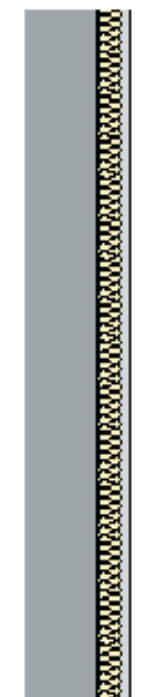

Water height	mm	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75
Discharge	l/sec									1,0	2,6	4,4	5,5	6,4	7,5	9,1
											<b>Silent</b>					

## System-Variant for LORO-X ATTIKASTAR® Scupper drainage system

**System component**  
**LORO-ATTIKASTAR®**  
**scupper emergency drain,**  
**DN 100**

mit **clamping flange for**  
**bituminous and plastic**  
**roofing sheets**

drain Art.-No. 01394.100X

Weight: 13,0 kg



**LX859-4X**

