





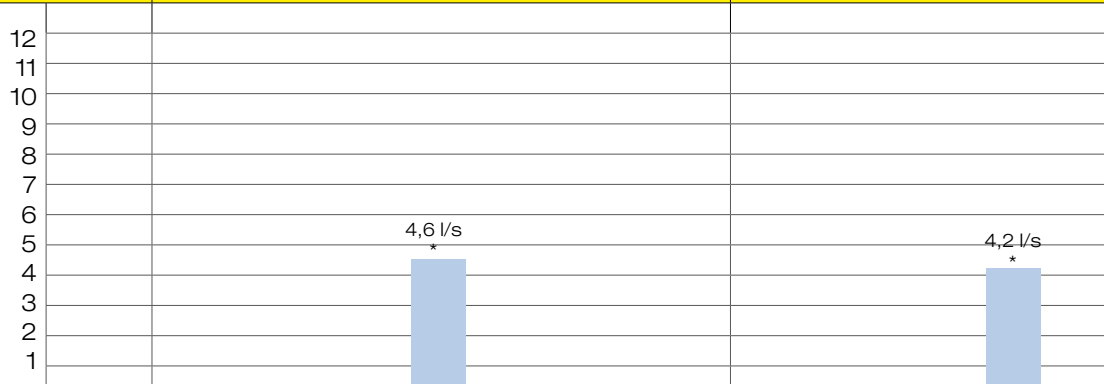


Series O with connecting sleeve, DN 70

		Main drainage	
		Gravity flow	
		Silent Power	
 Roof without insulation	one-piece 	Vertical runoff Version a: DN 70: 15275X Version b: DN 70: 15375X	Horizontal runoff Version a: DN 70: 15475X Version b: DN 70: 15575X
 Insulated roof	two-piece 	Vertical runoff Version a: DN 70: 15285X Version b: DN 70: 15385X	Horizontal runoff Version a: DN 70: 15485X Version b: DN 70: 15585X
DN	70		
Water height (mm)	35		
Weir height (mm)	0		
			
LX-No.	LX887	LX886	
Discharge Q (l/sec)			

Version a = without thermal insulation
 Version b = with thermal insulation

* Discharge capacity in keeping with test specification according to DIN EN 1253, downpipe length 4,2 m